


EPDM Lined Split Clamp



Features and Benefits

- lock bolts with combi cross recessed head
- for horizontal and vertical applications
- profiled for extra strength
- screws secured with anti-loss washer
- material: steel
- electrogalvanized as per ASTM B 633 Standards, BS 1706 FE/ZN 12
- temperature resistance from -30 °C to +120 °C
- noise insulating lining, EPDM, black
noise reduction up to 18dB (A)
- age resistant lining

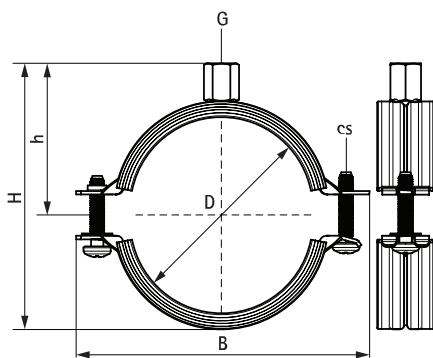

Part No.	D (mm)	D (")	Dia (mm)	G (mm)	B (mm)	H (mm)	h (mm)	Fa,z (N)	Pack 1
DMC315018	15 - 19	3/8"	15	M8	56.2	35.1	20.8	850	450
DMC315022	20 - 24	1/2"	22	M8	61.9	41.1	23.8	850	400
DMC315028	25 - 30	3/4"	28	M8	68.9	48.1	27.3	850	350
DMC315035	32 - 36	1"	35	M8	75.2	54.1	30.3	850	300
DMC315040	38 - 43	1 1/4"	42	M8	83.8	64.0	35.3	1250	250
DMC315048	47 - 51	1 1/2"	48	M8	93.1	73.0	39.8	1250	200
DMC315054	53 - 58	-	54	M8	99.3	79.0	42.8	1250	200
DMC315060	60 - 64	2"	60	M8	102.3	80.9	43.7	1250	125
DMC315063	63 - 66	-	63	M8	105.8	85.0	45.8	1250	125
DMC315070	68 - 72	-	70	M8	117.6	93.9	50.2	2130	125
DMC315075	74 - 80	2 1/2"	75	M8/M10	123.9	109.4	62.7	2130	200
DMC315083	81 - 86	-	83	M8/M10	129.9	115.4	65.7	2130	200
DMC315090	88 - 92	3"	90	M8/M10	138.6	119.5	67.8	2130	200
DMC315100	100 - 105	3 1/2"	100	M8/M10	151.2	132.1	74.1	2130	150
DMC315110	109 - 112	-	110	M8/M10	159.1	137.2	76.6	2130	150
DMC315115	113 - 118	4"	115	M8/M10	164.3	145.5	80.8	2130	150
DMC315125	125 - 130	-	125	M8/M10	176.4	159.5	87.8	2500	100
DMC315133	131 - 137	-	133	M8/M10	183.1	166.1	91.1	2500	100
DMC315140	140 - 142	5"	140	M8/M10	189.8	172.5	94.3	2500	100
DMC315150	149 - 153	-	150	M8/M10	199.7	182.5	99.3	2500	100
DMC315160	159 - 166	6"	160	M8/M10	211.9	195.1	105.6	2500	80
DMC315168	168 - 172	-	168	M8/M10	219.6	204.5	111.3	2500	80
DMC315200	200 - 212	8"	200	M8/M10	257.1	243.1	130.6	2500	50

Connection nut M8/M10, M10/M12,
Hot Dip Galvanized and Stainless Steel option available on request.
Measurements are subject to +/- 5% tolerance.
This Series replaces part number DMC215 series.