


Heavy Duty Clamp HD1501 (BUP1000)



Features and Benefits

- two-part clamp with two locking bolts
- up to and including 5": locking nut is captive, hidden in plastic holder
- heavy design
- bolts secured with anti-loss washer
- with CO² welded connection nut
- material: steel
- noise insulating lining, EPDM rubber,
- also available: noise insulating lining of silicone rubber (reddish brown), heat resistant up to +200 °C (A 35 15)
- age resistant lining
- surface protection
- product is part of the BIS UltraProtect® 1000 system
- suitable for in- and outdoor applications
- stands min. 1,000 hours salt spray test (max. 5% red rust) according to ISO 9227
- sound insulating lining according to DIN 4109
- Tested for fire safety

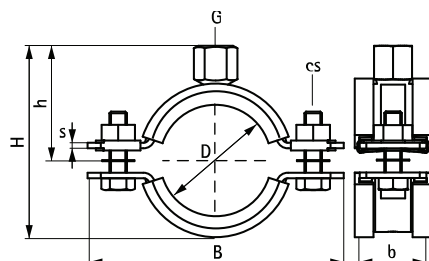

- < Ø 140 mm M8
- > Ø 159 mm M10
- > Ø 217 mm M12

Part No.	D (mm)	D (")	Dia (mm)	G (mm)	B (mm)	H (mm)	h (mm)	Fa,z (N)	RAL	Pack 1
33138019	15 - 19	3/8"	10	M8/10	81	55	35	1,500	RAL ²	25
33138023	19 - 23	1/2"	15	M8/10	84	58	37	1,500	RAL ²	25
33138029	25 - 29	3/4"	20	M8/10	91	64	40	1,500	RAL ²	25
33138035	30 - 35	1"	25	M8/10	98	70	43	1,500	RAL ²	25
33138045	40 - 45	1 1/4"	32	M8/10	109	80	48	1,500	RAL ²	25
33138051	46 - 51	1 1/2"	40	M8/10	115	86	51	1,500	RAL ²	25
33138059	53 - 59	-	-	M8/10	122	93	55	1,500	RAL ²	25
33138064	59 - 64	2"	50	M8/10	129	99	57	1,500	RAL ²	25
33148071	65 - 71	-	-	M10/12	136	116	71	1,500	RAL ²	25
33148078	72 - 78	2 1/2"	65	M10/12	144	123	74	1,500	RAL ²	25
33148085	79 - 85	-	-	M10/12	152	130	78	1,500	RAL ²	25
33148092	86 - 92	3"	80	M10/12	159	136	81	1,500	RAL ²	25
33148109	101 - 109	-	-	M10/12	175	154	90	1,500	RAL ²	25
33148116	108 - 116	4"	100	M10/12	182	160	93	1,500	RAL ²	25
33148133	125 - 133	-	-	M10/12	200	178	102	1,500	RAL ²	25
33148140	132 - 140	5"	125	M10/12	207	184	104	1,500	RAL ²	15
33148169	159 - 169	6"	150	M10/12	254	223	124	1,500	RAL ²	15
33148188	178 - 188	-	-	M10/12	274	242	133	1,500	RAL ²	15
33148204	194 - 204	-	-	M10/12	290	258	141	1,500	RAL ²	15
33148213	203 - 213	-	-	M10/12	299	267	146	1,500	RAL ²	15
33148227	217 - 227	8"	200	M10/12	322	282	152	1,500	RAL ²	2
33168169	159 - 169	6"	150	M16	254	220	120	3,800	RAL ²	15
33168188	178 - 188	-	-	M16	274	239	130	3,800	RAL ²	15
33168204	194 - 204	-	-	M16	290	255	138	3,800	RAL ²	15
33168213	203 - 213	-	-	M16	299	264	143	3,800	RAL ²	15
33168227	217 - 227	8"	200	M16	322	278	150	3,800	RAL ²	2
33168250	240 - 250	-	-	M16	345	302	163	3,800	RAL ²	2
33168275	265 - 275	10"	250	M16	367	327	175	9,200	RAL ¹	2
33168325	315 - 325	12"	300	M16	414	374	198	9,200	RAL ¹	2
33168364	354 - 364	14"	350	M16	453	412	217	9,200	RAL ¹	2
33168408	398 - 408	16"	400	M16	497	456	239	9,200	RAL ¹	2
33168458	448 - 458	18"	450	M16	548	506	264	9,200	RAL ¹	2
33168509	499 - 509	20"	500	M16	599	557	289	9,200	RAL ¹	2

RAL¹ = tested, certified and externally monitored according to RAL-GZ 655/B.

RAL² = tested, certified and externally monitored according to RAL-GZ 655/B and RAL-GZ 656. For detailed technical information about our RAL marked products, please see the RAL datasheet in our webcatalogue: www.walraven.com/gb/en/catalogue/