


- lock bolts with combi cross recessed head
- for horizontal and vertical applications
- strengthened lock bolts for high load capacity
- screws secured with anti-loss washer
- material: steel
- electrogalvanized as per ASTM B 633 Standards. BS 1706 FE/ZN 12

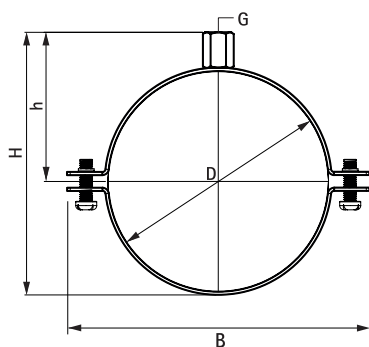

Part No.	D (mm)	D (")	Dia (mm)	G (mm)	B (mm)	H (mm)	h (mm)	Fa,z (N)	Pack 1
DMC133018	15 - 19	3/8"	15	M8/M10	59	30	23	2,000	600
DMC133022	20 - 24	1/2"	22	M8/M10	66	37	26	2,000	500
DMC133028	25 - 30	3/4"	28	M8/M10	72	43	29	2,000	400
DMC133035	32 - 36	1"	35	M8/M10	79	50	33	2,000	350
DMC133040	38 - 43	1 1/4"	42	M8/M10	86	57	36	2,000	300
DMC133048	47 - 51	1 1/2"	48	M8/M10	92	63	39	2,000	250
DMC133054	53 - 58	-	54	M8/M10	98	69	42	2,000	250
DMC133060	60 - 62	2"	60	M8/M10	104	75	45	2,000	200
DMC133063	63 - 66	-	63	M8/M10	108	72	47	2,000	200
DMC133070	68 - 72	-	70	M8/M10	114	85	50	2,000	150
DMC133075	74 - 80	2 1/2"	75	M8/M10	119	90	53	2,000	150
DMC133083	81 - 86	-	83	M8/M10	127	98	57	2,000	150
DMC133090	87 - 92	3"	90	M8/M10	134	105	60	2,000	150
DMC133100	99 - 105	3 1/2"	100	M8/M10	144	115	65	2,000	125
DMC133110	107 - 112	-	110	M8/M10	154	125	70	2,000	125
DMC133115	113 - 118	4"	115	M8/M10	159	130	73	2,000	100
DMC133125	125 - 130	-	125	M8/M10	169	140	78	2,000	100
DMC133133	131 - 137	-	133	M8/M10	177	148	82	2,000	100
DMC133140	138 - 142	5"	140	M8/M10	184	155	85	3,000	50
DMC133150	148 - 153	-	150	M8/M10	194	165	90	3,000	50
DMC133160	159 - 166	-	160	M8/M10	204	175	95	3,000	50
DMC133168	168 - 172	6"	168	M8/M10	212	183	99	3,000	50
DMC133200	200 - 212	-	200	M8/M10	244	215	115	3,000	40
DMC133220	215 - 220	8"	220	M8/M10	264	235	125	3,000	40
DMC133250	249	-	250	M8/M10	294	265	140	3,000	25
DMC133315	313 - 318	-	315	M8/M10	359	330	173	3,000	25

Hot Dip Galvanized and Stainless Steel option available on request.
With connection size M10/12 available on request.
With M6 Side Nuts available on request.