


RapidStrut® Fixing Rail Double



Features and Benefits

- universal rail system
- with continuous perforation
- a continuous graduated centimetre scale on one side
- with inward formed flanges with serrated profile for extra grip
- material: steel 1.0332
- yield strength 240 N/mm²
- pre-galvanized as per ASTM A 653
- tested for fire safety
- with inward formed flanges with serrated profile for extra grip

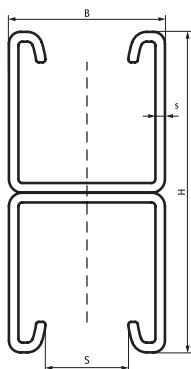

Part No.	L (m)	B (mm)	H (mm)	s (mm)	S (mm)	App
DMC5514121D	3m	41	42(21x2)	1.5	22	m.
DMC5514141D	3m	41	82(41x2)	1.5	22	m.
DMC5524121D	3m	41	42(21x2)	2.0	22	m.
DMC5524141D	3m	41	82(41x2)	2.0	22	m.
DMC5534121D	3m	41	42(21x2)	2.5	22	m.
DMC5534141D	3m	41	82(41x2)	2.5	22	m.
DMC6505666	6m	41	124(62x2)	2.5	22	m.
6505686	6m	41	164(82x2)	2.5	22	m.

*Hot Dip Galvanized option available on request.
DMC55x41xxD-HDG (DMC version HDG)
65056xx (HDG)
For more information about the max. allowed load (Fa,z) please refer to the loading tables.*