
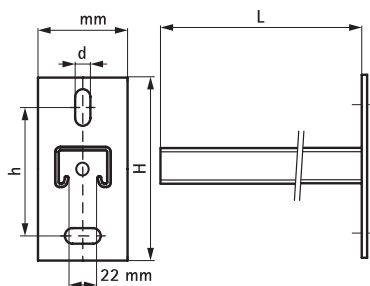


RapidStrut® Cantilever Arms

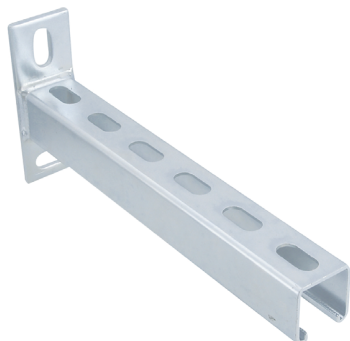

Features and Benefits

- wall plate welded on Strut Profile
- slots at 90° to each other to simplify fixing
- CO² welded
- with inward formed flanges with serrated profile for extra grip
- material: steel 1.0226
- surface protection:
 - Electrogalvanized as per ASTM B633 standards BS 1706 FE/ZN 12

Part No.	L (m)	H (mm)	h (mm)	For Rail	d1 (mm)	Pack 1
DMC6603831	200	110	80	Strut 41x21x2.5	25x11	10
DMC6603832	300	110	80	Strut 41x21x2.5	25x11	10
DMC6603833	450	110	80	Strut 41x21x2.5	25x11	10
DMC6603834	600	110	80	Strut 41x21x2.5	25x11	10
DMC6603923	300	130	89.5	Strut 41x41x2	30x13	10
DMC6603926	450	130	89.5	Strut 41x41x2	30x13	10
DMC6603925	500	130	89.5	Strut 41x41x2	30x13	10
DMC6603928	600	130	89.5	Strut 41x41x2	30x13	8
DMC6603861	150	130	89.5	Strut 41x41x2.5	30x13	10
DMC6603870	200	130	89.5	Strut 41x41x2.5	30x13	10
DMC6603862	300	130	89.5	Strut 41x41x2.5	30x13	10
DMC6603871	400	130	89.5	Strut 41x41x2.5	30x13	10
DMC6603863	450	130	89.5	Strut 41x41x2.5	30x13	10
DMC6603873	500	130	89.5	Strut 41x41x2.5	30x13	10
DMC6603864	600	130	89.5	Strut 41x41x2.5	30x13	8
DMC6603865	750	130	89.5	Strut 41x41x2.5	30x13	8
DMC6603866	1000	130	89.5	Strut 41x41x2.5	30x13	1
DMC6603867	1200	130	89.5	Strut 41x41x2.5	30x13	1

Hot Dip Galvanized option available on request.

Custom length available upon request.

For more information about the max. allowed load (Fa,z) please refer to the loading tables or our technical datasheet