


RapidStrut® Base Plate

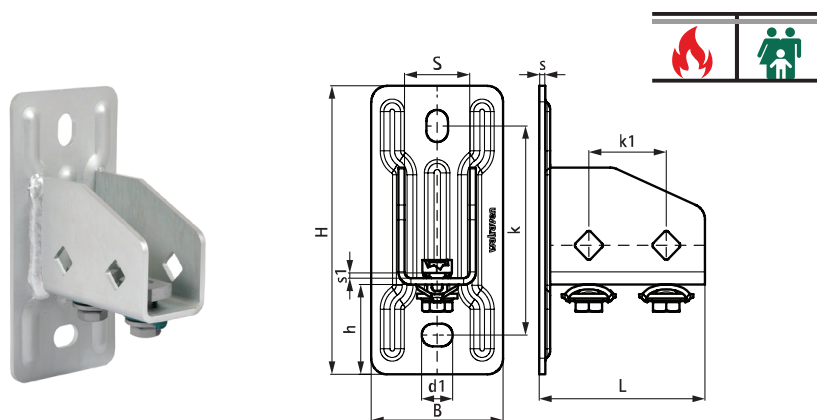

Features and Benefits

- flexible base plate for Strut rails
- suitable for Strut rail up to 82mm height
- open side of rails 41x41 can be turned to all sides
- time saving with pre-assembled fasteners
- tested for fire safety according to EN 1366-1
- material: metal parts made of steel 1.0332; made of POM (polyoxymethylene), green
- surface protection:
 - for 66583804 Electrogalvanized as per ASTM B633 standards BS 1706 FE/ZN 12
 - for 665885400 BIS UltraProtect® 1000
 - suitable for in- and outdoor applications
 - stands min. 1,000 hours salt spray test (max. 5% red rust) according to ISO 9227

Part No.	L (mm)	B (mm)	H (mm)	h (mm)	s (mm)	d1 (mm)	S (mm)	k (mm)	k1 (mm)	Surface Treatment	Pack 1
665885400	107	85	180	56	4.0	20x14	42	130.5	50	BUP1000	10
66583804	107	85	180	56	4.0	20x14	42	130.5	50	zp	10

Fa,z: max. allowed load in combination with 2 slide nuts M10, tightened with 40 Nm.
Fa,z 2: max. allowed load in combination with 2 throughbolts M10, tightened with 40 Nm.
Ma,y: max. moment in combination with 2 throughbolts M10, tightened with 40 Nm.