


Standard Seismic Cables

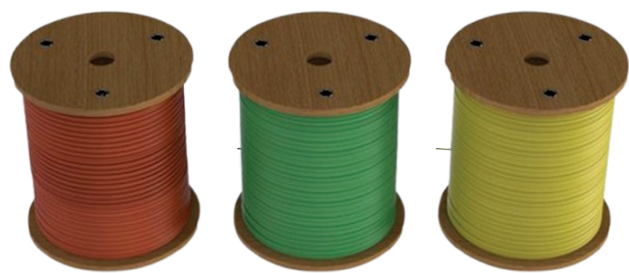

Features and Benefits

- Easy to move around spool sizes.
- Customizable cable length.
- Secure brace connection with Crimping sleeves.
- Designed to verify that cable assemblies, fittings can maintain the cable nominal breaking strenght as per ASCE 19, as required by IBC, ASCE 7 and NFPA 13.
- Have swaged end fittings as required by 2012 IBC per ASCE 19-10.

Part No.	Wire Diameter (mm) Min - Max	Cable Length (m)	Color	Load Ratings (N)	Minimum Breaking Strength (N)	Factor of safety
DMSCBL-ST-025	2.5	100	Gold	2,015	4,433	2.20
DMSCBL-ST-035	3.5	100	Orange	4,825	10,614	2.20
DMSCBL-ST-045	4.5	100	Green	8,659	19,050	2.20