

W-LX-P/W-LX-PX Concrete Screws

Product overview

The W-LX-P/W-LX-PX concrete screws are characterised by versatility, quick and easy installation and high load capacity in cracked and non-cracked concrete.
The W-LX-P/W-LX-PX screw has a pan head with T30 Torx drive.



ETA Option 1
ETA-21/0612

ETA ETAG001 Part 6
ETA-21/0613



Fire Resistance
R120

Material
Steel, zinc plated




Features and benefits


- ETA ETAG001 Part 6 approval for multiple use for non-structural applications
- Simple and quick installation procedure
- Approved for use in precast prestressed hollow core slabs
- Reduced edge and anchor spacing distances
- Fire resistance class R30-R120 for design of anchorages under exposure to fire
- High load capacity
- Through-fixing

Substrate type


- Non-cracked concrete
- Cracked concrete
- Precast prestressed hollow core slabs

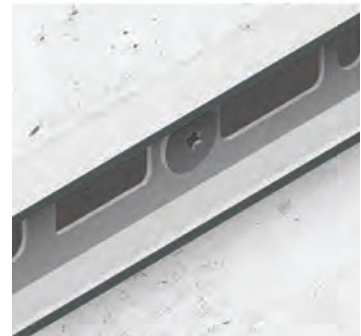

Installation guide

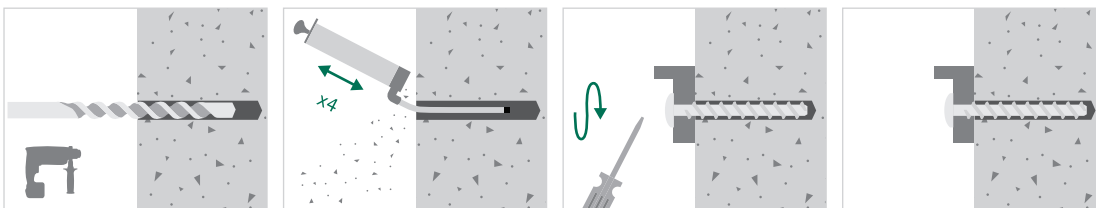

Product information

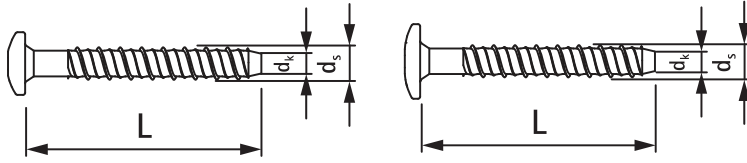

Part No.	Description	Anchor Size	d_k (mm)	d_s (mm)	L (mm)	Box qty (pcs)	Outer box qty (pcs)
62431304	W-LX-P 6x40	6x40	6	7.6	40	100	38400
62431306	W-LX-P 6x60	6x60	6	7.6	60	100	38400
62432304	W-LX-PX 6x40	6x40	6	7.6	40	100	38400
62432306	W-LX-PX 6x60	6x60	6	7.6	60	100	38400

Recommended loads*

Option 1 ETA-21/0612 – Multiple use for non-structural applications

Recommended tension load in C20/25 concrete

Part No.	Description	Cracked	Non-cracked
		N_{rec} (kN)	N_{rec} (kN)
62431304	W-LX-P 6x40	-	-
62431306	W-LX-P 6x60	3.33	5.71
62432304	W-LX-PX 6x40	-	-
62432306	W-LX-PX 6x60	3.33	5.71


*Recommended loads: apply to correctly installed anchors at maximum embedment depth; include partial safety factor and an overall partial safety factor for action of 1.4. The partial safety factor for action depends on the type of loading and shall be taken from national regulations. All anchor failure modes and the entire relevant product European Technical Assessment must be considered for anchor design.

ETAG001 Part 6 ETA-21/0613 – Multiple use for non-structural applications

Recommended tension load in C20/25 concrete

Part No.	Description	Cracked	Non-cracked
		N_{rec} (kN)	N_{rec} (kN)
62431304	W-LX-P 6x40	1.42	1.42
62431306	W-LX-P 6x60	4.28	4.28
62432304	W-LX-PX 6x40	1.42	1.42
62432306	W-LX-PX 6x60	4.28	4.28

Installation data

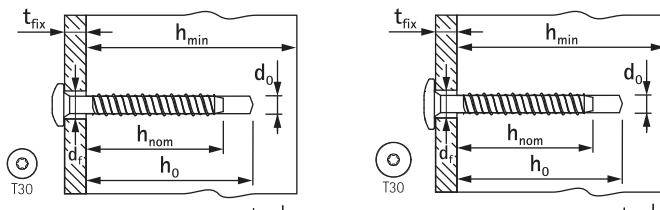

Part No.	Description	d_0 (mm)	$\geq h_0$ (mm)	h_{min} (mm)	h_{nom} (mm)	C_{min} (mm)	S_{min} (mm)	$t_{fix,max}$ (mm)
62431306, 62432306*	W-LX-P, W-LX-PX 6x60	6	65	100	h_{nom} 55	45	45	5
62431304, 62432304**	W-LX-P, W-LX-PX 6x40	6	45	80	h_{nom} 35	45	45	5
62431306, 62432306***	W-LX-P, W-LX-PX 6x60	6	65	100	h_{nom} 55	45	45	5

Installation data provided according to *ETAG001 Part 6 ETA-21/0612; **Option 1 ETA-21/0613, reduced embedment depth. ***Option 1 ETA-21/0613, reduced embedment depth.