


EPDM Lined Standard Clevis Hanger



Features and Benefits

- designed for different MEP application
- design permits vertical adjustments of pipe after installation
- hanger load nut above clevis must be tightened securely to ensure proper hanger performance
- material: steel
- noise insulating lining, EPDM, black
- designed to meet MSS Standard SP-58, type 1 and and SP-69
- noise reduction up to 18dB (A)
- temperature resistance from -20 °C temp to +110°C
- electrogalvanized as per ASTM B 633 Standards, BS 1706 FE/ZN 12

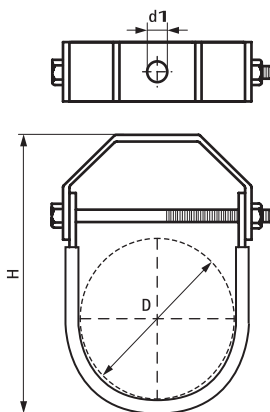

Part No.	(mm)	(")	(mm)	(mm)	(N)	Pack 1
DMC932022	22	1/2"	60	10	2,500	200
DMC932028	28	3/4"	69	10	2,500	200
DMC932035	35	1"	78	10	2,500	170
DMC932040	42	1 1/4"	87	10	2,500	150
DMC932048	48	1 1/2"	101	10	2,500	100
DMC932060	60	2"	105	10	2,500	70
DMC932075	75	2 1/2"	144	10	3,000	60
DMC932090	90	3"	156	10	3,000	50
DMC932100	100	3 1/2"	180	10	3,000	50
DMC932115	115	4"	192	10	3,000	25
DMC932140	140	5"	235	12	3,000	30
DMC932168	168	6"	276	12	4,000	25
DMC932219	219	8"	345	12	4,000	20
DMC932273	273	10"	419	16	4,000	5
DMC932323	323	12"	490	20	5,500	3
DMC932355	355	14"	556	20	5,500	3
DMC932406	406	16"	610	24	12,000	3
DMC932457	457	18"	675	24	12,000	3
DMC932508	508	20"	715	30	15,000	2
DMC932610	610	24"	850	30	15,000	1
DMC932755	755	30"	995	30	15,000	1

Hot Dip Galvanized and Stainless Steel option available on request.
Measurements are subject to +/- 5% tolerance.