
Two Bolt Clamp



Features and Benefits

- design to act as a horizontal support
- two bolt arrangements provide sturdier support
- material: steel
- supplied with bolt and nuts
- electro galvanized as per ASTM B633 Standards, BS 1706 FE/ZN 12
- designed to meet MSS Standard SP-58 2002, type 42 and and SP-69

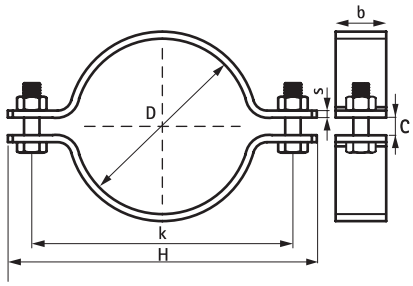

Part No.	D (")	G (mm)	k (mm)	H (mm)	C (mm)	Fa,z	Pack 1
DMC211022	½	M10	68	97	12	1,700	50
DMC211028	¾	M10	76	105	12	1,700	50
DMC211035	1	M10	84	113	12	1,700	50
DMC211040	1¼	M10	92	121	12	1,700	40
DMC211048	1½	M10	98	127	12	1,700	40
DMC211060	2	M10	116	156	16	1,700	40
DMC211075	2½	M12	142	182	16	4,000	35
DMC211090	3	M12	156	196	16	4,000	35
DMC211100	3½	M12	168	208	16	4,000	30
DMC211115	4	M12	180	220	19	4,000	30
DMC211140	5	M16	214	252	19	6,000	20
DMC211168	6	M16	242	290	22	6,000	15
DMC211220	8	M16	300	352	25	11,000	5
DMC211273	10	M16	358	406	25	12,000	4
DMC211323	12	M20	430	490	25	15,000	3
DMC211355	14	M20	480	546	28	15,000	3
DMC211406	16	M20	532	597	28	22,000	2
DMC211457	18	M20	610	686	32	22,000	2
DMC211508	20	M20	680	776	35	22,000	1
DMC211610	24	M20	780	876	42	22,000	1

Hot Dip Galvanized and Stainless Steel option available on request.