


Roller Stand



Features and Benefits

- for support of pipe where horizontal movement due to expansion and contraction may occur
- vertical adjustment up to 6" is possible
- Material
 - bracket: steel
 - roller: cast iron
- Surface Protection
 - bracket: hot dipped galvanized as per ASTM A123/A123M Standards
 - roller: nickle plated
 - stud and nuts: hot dipped galvanized as per ASTM A123/A123M Standards
- designed to meet BS476-1: 1974; MSS Standard SP-58-2002, type 44 and SP-69

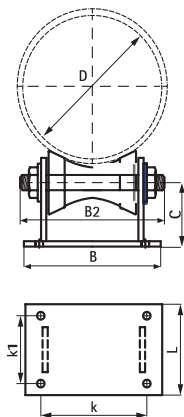

Part No.	D (")	L (mm)	B (mm)	B2 (mm)	d1 (mm)	k (mm)	k1 (mm)	C (mm)	Fa, z (N)
DMC277060100	2" 2½" 3" 3½"	152	213	140	16	86	102	44	5,200
DMC277115168	4" 5" 6"	152	251	155	16	121	108	52	5,200
DMC277219273	8" 10"	178	219	275	20	178	127	87	12,500
DMC277323355	12" 14"	203	276	340	20	229	152	98	16,000
DMC277406508	16" 18" 20"	229	318	406	24	264	165	108	36,000
DMC277558609	22" 24"	229	343	440	24	292	165	111	53,000
DMC277660762	26" 28" 30"	305	432	500	28	362	197	130	74,000
DMC2779141067	36" 42"	300	500	540	28	415	215	125	103,000

Electrogalvanized as per ASTM B633 Standards available on request.