

Strut Slide Nut



DMC651xxx




DMC8884xxx



DMC8881xxx

Features and Benefits

- material: slide nut made of steel 1.0332
- spring made of spring steel DIN17223 (class A)
- surface protection:
 - zinc plated
 - Hot dip galvanized as per
 - ASTM A123/A 123M Standards

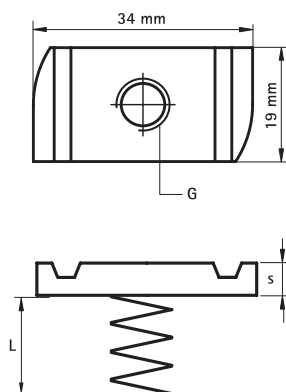

Part No.	G	L (mm)	s (mm)	For Rail	T (max) (Nm)	Fa,z (N)	Surface Treatment	Pack 1	Pack 2
DMC6517006	M6	—	5.0	Strut	7.5	5,300	ZP	100	600
DMC6517008	M8	—	6.0	Strut	15	6,000	ZP	100	500
DMC6517010	M10	—	8.0	Strut	15	9,500	ZP	100	600
DMC6517012	M12	—	9.0	Strut	30	10,000	ZP	100	500
DMC8884006	M6	13	5.0	Strut 41x21	7.5	5,300	ZP	100	600
DMC8884008	M8	13	6.0	Strut 41x21	15	6,000	ZP	100	600
DMC8884010	M10	13	8.0	Strut 41x21	15	9,500	ZP	100	600
DMC8884012	M12	13	9.0	Strut 41x21	30	10,000	ZP	100	600
DMC8881006	M6	33	5.0	Strut 41x41	7.5	5,300	ZP	100	600
DMC8881008	M8	33	6.0	Strut 41x41	15	6,000	ZP	100	600
DMC8881010	M10	33	8.0	Strut 41x41	15	9,500	ZP	100	600
DMC8881012	M12	33	9.0	Strut 41x41	30	10,000	ZP	100	600
DMC6518006	M6	-	5.0	Strut	7.5	5,300	HDG	100	600
DMC6518008	M8	-	6.0	Strut	15	6,000	HDG	100	500
DMC6518010	M10	-	8.0	Strut	15	9,500	HDG	100	600
DMC6518012	M12	-	9.0	Strut	30	10,000	HDG	100	500

M10 and above tested for fire safety.

HDG option for DMC65170... Series are DMC6518... series available on request

DMC8884.....-HD for Hot dip galvanized option available on request

DMC8881.....-HD for Hot dip galvanized option available on request