


Beam Clamp Model C

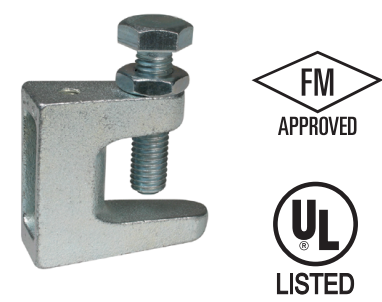

Features and Benefits

- for a solid fixing to steel structures without the need for welding or drilling
- according to VdS-regulations an additional safety strap should be used when supporting pipes above DN65
- bolt with hexagon head according to DIN 933 strength class 8.8, screw point with cup ring according to EN ISO 4753 and lock nut
- material: beam clamp made of cast iron; bolt of hardened steel, nut of steel, zinc plated
- accesories: BIS Safety Strap

| Part No. | A (mm) | R   | G   | H (mm) | SW1 (mm) | Fa,z (N) | FM/UL       | Pack 1 |
|----------|--------|-----|-----|--------|----------|----------|-------------|--------|
| 6003206  | 23     | M6  | M10 | 45     | 17       | 2,500    | -           | 50     |
| 6003208  | 23     | M8  | M8  | 35     | 13       | 2,500    | VdS         | 50     |
| 6003010  | 20     | M10 | M10 | 42     | 17       | 2,500    | FM, UL, VdS | 50     |
| 6003012  | 26     | M12 | M10 | 54     | 17       | 3,500    | FM, UL, VdS | 50     |
| 6003016  | 28     | M16 | M12 | 58     | 19       | 5,500    | FM, UL, VdS | 50     |

Also available in *Stainless steel 1.4404 (AISI-no. 316L)*.

